
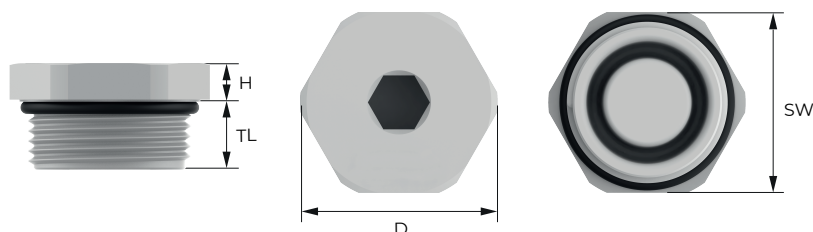



# Blind Plugs, Hex Socket, Polyamide

## Blind Plugs, Hex Socket, without thread

- For standard industrial applications.
- Seal of housing hole when no cable gland is used.
- To fasten with spanner.

| Technical Details         |                                           |                   |
|---------------------------|-------------------------------------------|-------------------|
| Plug Material             | Polyamide 6 (30 % Glass Fiber Reinforced) |                   |
| O-Ring Material           | NBR                                       |                   |
| Ingress Protection Rating | IP68 - 5 Bar 30 min                       |                   |
| Temperature Range         | Permanent                                 | Intermittent      |
|                           | -20 °C to +100 °C                         | -40 °C to +150 °C |
| Thread Type               | Metric                                    |                   |
| Accessories               | • Lock nuts                               |                   |
| Remarks                   | • Accessories must be ordered separately. |                   |



Thread Type **METRIC** acc. to EN 60423

| Thread Size | TL   | SW   | Outer Ø 'D' | Max. Height 'H' | RAL 7035            | RAL 7001            | RAL 9005            |
|-------------|------|------|-------------|-----------------|---------------------|---------------------|---------------------|
| M20x1,5     | 9,0  | 24,0 | 25,5        | 25,3            | BMBS-12(AW)(TL9)    | BMBS-02(AW)(TL9)    | BMBS-22(AW)(TL9)    |
| M25x1,5     | 10,5 | 28,0 | 30,5        | 25,3            | BMBS-13(AW)(TL10.5) | BMBS-03(AW)(TL10.5) | BMBS-23(AW)(TL10.5) |
| M32x1.5     | 11,5 | 36,0 | 38,0        | 25,3            | BMBS-14(AW)(TL11.5) | BMBS-04(AW)(TL11.5) | BMBS-24(AW)(TL11.5) |