





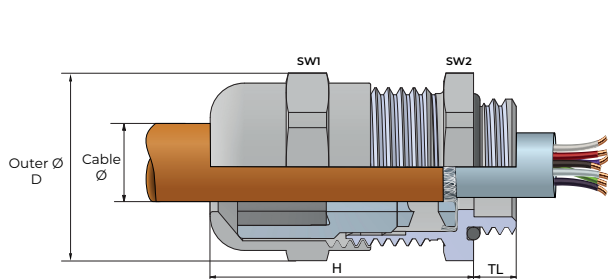


EMC1 Cable Glands Brass

Brass cable gland for EMC

- Specially designed EMC protective cable glands.
- High quality strain relief and sealing, reliable performance for EMC applications.

Technical Details		
Material	Body, Cap	Nickel plated Brass
	Seal	CR (Chloroprene)
	Clamping Insert	PA 6 (Polyamide 6)
	O-ring	NBR
Ingress Protection Rating		IP68 - 5 Bar 30 min, IP69, IP66
Flammability		V2 according to UL94
Operating Temperature	Permanent	-40 °C to +100 °C
	Intermittent	-40 °C to +150 °C
Thread Type		• Metric EN 60423 • Other thread types also available upon request.
Cable Type		Shielded
Accessories	• EMC Lock nuts • Dome plugs • Gaskets (Washers)	
Remarks		• In compliance with DIN EN 62444. • Accessories must be ordered separately.

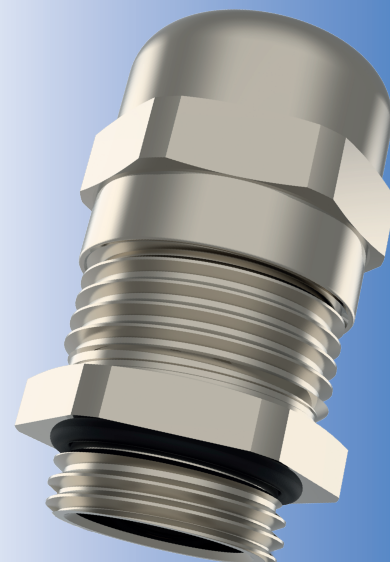

Thread Type **METRIC** acc. to EN 60423

Outer Thread Size (Male)	Cable Ø min-max mm	Outer Thread Length TL mm	Spanner Width		Outer Ø D mm	max. Height H mm	Part Number
			Cap SW 1 mm	Body SW 2 mm			
M16x1.5	4,0 - 8,0	5,0	17	17	18,8	29,0	BMEM1-01
M16x1.5	5,0 - 10,0	5,0	20	20	22,0	36,0	BMEM1-E1
M20x1.5	7,0 - 13,0	6,0	24	24	26,5	36,5	BMEM1-E2S
M25x1.5	11,0 - 17,0	7,0	27	27	30,0	39,5	BMEM1-E3
M32x1.5	15,0 - 21,0	8,0	34	34	37,0	41,0	BMEM1-E4

Order Coding

Part Number	- Gasket (Washer)	EMC Lock Nut	Sealing Plug
Mandatory	- Option	Option	Option
See table	- WC Chloroprene	L Lock nut	P Dome Plug T Dust Plug
Example			
BMEM1-E1	- WC	L	P