

Technical Data Sheet - Ventilation Plugs, Stainless Steel

General

Designed to provide reliable pressure equalization inside sealed housings and enclosures. Prevents the formation of water condensation and protects against damage caused by pressure differences.


Extends the service life of equipment by reducing stress on enclosure gaskets and seals. Provides effective protection against water, dust and contaminants while allowing controlled airflow.

Manufactured from high-quality, corrosion-resistant stainless steel. Suitable for indoor, outdoor, and harsh industrial environments



Technical

Plug Material	Stainless Steel (1.4305/303)
Vent. (Membrane) Material	Acrylic copolymer on nylon-support
O-Ring Material	NBR
Ingress Protection Rating	IP68, IP67
Temperature Range	-40 °C to +100 °C
Thread Type	Metric, PG
Accessories	Locknut
Remarks	Accessories must be ordered separately Other materials available on request: Stainless Steel 316L

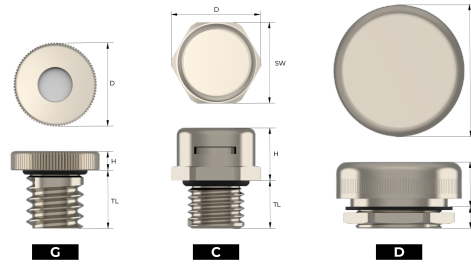

Thread Size	Air Flow Rate (l/h)	Water Intrusion Pressure	TL	SW	Outer Ø 'D'	Height 'H'	Design Type	MOQ	Product Code
M8x0,75	4.0	0.9	8.0	-	12.3	2.7	G	1000	SBAVP-02

Certificates



Bimed Teknik Aletler San. ve Tic. A. Ş.

Özar Sanayi Bölgesi, Deliklikaya Mh. Yüzbaşı Mehmet Hilmi Cd. No.28/1 Arnavutköy 34555 / İstanbul / Türkiye

T: +90 212 875 73 76

bimedteknik.com

info@bimedteknik.com

