


## Technical Data Sheet - Hexagonal Blind Plugs, Polyamide


### General

For standard industrial applications.  
Seal of housing hole when no cable gland is used.  
To fasten with spanner.

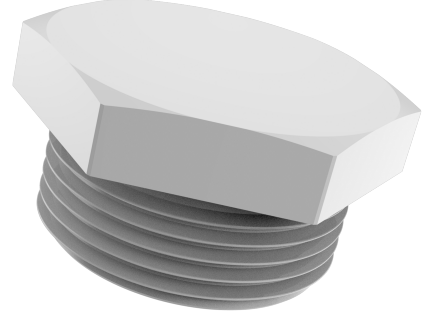

### Technical

|                           |   |
|---------------------------|---|
| Plug Material             | Polyamide 6 V2 acc. to UL 94                              |
| Ingress Protection Rating | IP68 - 5 Bar 30 min                                       |
| Temperature Range         | Permanent -20°C to +100°C<br>Intermittent -40°C to +150°C |
| Thread Type               | Metric,NPT  |

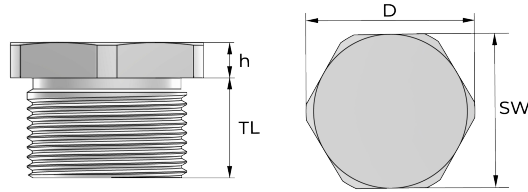

| Thread Size | TL   | SW   | Outer Ø 'D' | Height 'H' | RAL 7035         | RAL 7001         | RAL 9005         |
|-------------|------|------|-------------|------------|------------------|------------------|------------------|
| M16x1,5     | 15.0 | 19.0 | 22.0        | 4.3        | BMBS-11(A)(TL15) | BMBS-01(A)(TL15) | BMBS-21(A)(TL15) |

### Certificates



#### Bimed Teknik Aletler San. ve Tic. A. Ş.

Özar Sanayi Bölgesi, Deliklikaya Mh. Yüzbaşı Mehmet Hilmi Cd. No.28/1 Arnavutköy 34555 / İstanbul / Türkiye

T: +90 212 875 73 76

[bimedteknik.com](http://bimedteknik.com)

[info@bimedteknik.com](mailto:info@bimedteknik.com)

