

Technical Data Sheet - Vega


General

For applications in explosive environments.
Can be used for 7J high impact applications.
Special design.
Easy assembly.
Can be used with intrinsically safe circuits.
High quality strain relief and sealing, reliable performance for standard hazardous area applications.
Up-to-date international approvals.



Technical

Suitable for use in	Group II, Group III
Equipment Marking	EX II 2GD Ex eb IIC Gb, Ex tb IIIC Db
Ingress Protection Rating	IP66, IP68 - 5 Bar, 30 min
Cable Gland Material	PA 6 (Polyamide 6)
Seal Material	Operating Temperature
Chloroprene, Silicone	Chloroprene: -40°C to +70°C
Silicone: -60°C to +70°C	Thread Type
Metric, NPT	Other thread types available upon request.
Cable Type	Non Armoured
Accessories	Lock nuts, Gaskets (Washers), Dome plugs, Dust plugs, Double Seals
Remarks	Accessories must be ordered separately. O-ring available in Metric outer threads.

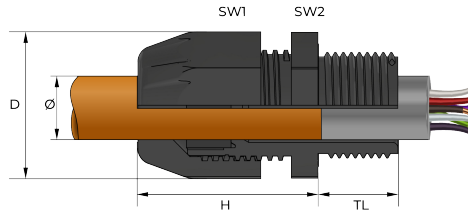

Thread Size	Cable Ø	TL	SW 1/2	Outer Ø 'D'	Max. Height 'H'	Product Code
M50x1,5	22,0 - 38,0	18,0	60/60	67,5	60,1	EHIBM-X9(DS)

Certificates



Bimed Teknik Aletler San. ve Tic. A. Ş.

Özar Sanayi Bölgesi, Deliklikaya Mh. Yüzbaşı Mehmet Hilmi Cd. No.28/1 Arnavutköy 34555 / İstanbul / Türkiye
T: +90 212 875 73 76

bimedteknik.com
info@bimedteknik.com

