

## Technical Data Sheet - Locknuts Flanged


### General

It is an accessory used to secure cable gland  
It is designed for use in non-threaded holes on enclosures



### Technical

|                       |                                           |
|-----------------------|-------------------------------------------|
| Material              | Polyamide 6 (30 % Glass Fiber Reinforced) |
| Flammability          | HB according to UL94                      |
| Operating Temperature | -20°C to +100°C                           |
| Thread Type           | Metric, NPT, PG, PF/G                     |

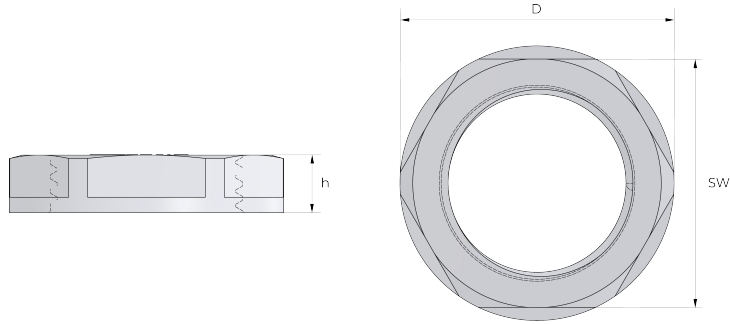

| Thread Size 'F' | SW | Outer Ø 'D' | Height 'H' | MOQ  | RAL 7035 | RAL 7001 | RAL 9005 |
|-----------------|----|-------------|------------|------|----------|----------|----------|
| PG 21           | 36 | 38.8        | 7.0        | 3000 | BL-16    | BL-06    | BL-26    |

### Certificates

#### Bimed Teknik Aletler San. ve Tic. A. Ş.

Özar Sanayi Bölgesi, Deliklikaya Mh. Yüzbaşı Mehmet Hilmi Cd. No.28/1 Arnavutköy 34555 / İstanbul / Türkiye

T: +90 212 875 73 76

[bimedteknik.com](http://bimedteknik.com)

[info@bimedteknik.com](mailto:info@bimedteknik.com)

