

## Technical Data Sheet - Standard Cable Glands, Stainless Steel


### General

Used in all industrial application areas where high corrosion resistance is required.  
Suitable for both indoor and outdoor use, including stainless steel installations, chemical environments, and other harsh industrial conditions  
Designed for use with non-armoured cables, conforming to EN 62444 and UL514B standards  
High protection against dust, moisture, and water ingress  
High tensile strength and reliable strain relief  
Durable design with quick and easy assembly  
Wide cable clamping ranges for versatile applications



### Technical

Cap/Body Material	Stainless Steel (1.4305/303)
Seal Material	Neoprene (Chloroprene)
Clamping Insert Material	Polyamide 6 V2 acc. to UL 94
O-Ring Material	NBR
Ingress Protection Rating	IP68 - 5 Bar 30 min, IP69, IP66
Type Rating	1, 4, 4X, 12, 13
Temperature Range	Permanent -20 °C to +100 °C Intermittent -40 °C to +150 °C
Thread Type	Metric, PG, NPT
Cable Type	Non-Armoured
Accessories	Locknut Dome plug Gasket (Washer) Reducing seal Double seal

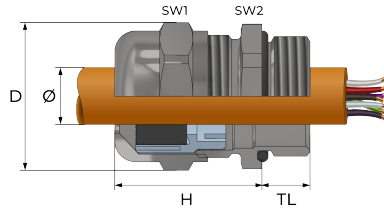

Thread Size	Cable Ø	TL	SW 1/2	Outer Ø 'D'	Max. Height 'H'	MOQ	Product Code
PG 48	34,0 - 44,0	14,0	65/65	72,0	54,5	40	BSSC-10

### Certificates



#### Bimed Teknik Aletler San. ve Tic. A. Ş.

Özar Sanayi Bölgesi, Deliklikaya Mh. Yüzbaşı Mehmet Hilmi Cd. No.28/1 Arnavutköy 34555 / İstanbul / Türkiye

T: +90 212 875 73 76

[bimedteknik.com](http://bimedteknik.com)

[info@bimedteknik.com](mailto:info@bimedteknik.com)

